

900.601.503.081

PX603146 3.0V 1950 mAh Li-MnO₂

Key Features:

- Nominal Voltage 3.0V
- Energy Density up to 450Wh/kg
- High Safety
- No Passivation
- Long Shelf Life
- UL, UN38.3 and RoHS Certified



Main Applications:

- Security System
- Smart Metering
- RFID Devices
- Medical Devices
- GPS Tracking System
- Wireless Transmitting
- Smart Home Devices
- UPS for Data Recording

Characteristics (23±2°C, in 1 year)

Open Circuit Voltage	≥3.1V
----------------------	-------

Nominal Capacity	1950mAh
------------------	---------

Battery discharged at continuous current 5mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage

Maximum Continuous Current	800mA
----------------------------	-------

Battery discharged for minimum 50% of rated capacity

Maximum Pulse Discharge Current	1000mA
---------------------------------	--------

Battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break

Dimensions	Refer to page 2
------------	-----------------

Weight	16.0g
--------	-------

Lithium Content	0.57g
-----------------	-------


Storage Condition	Temperature ≤ 30°C Humidity ≤ 75%RH
-------------------	----------------------------------------

Operating Temperature	- 40~+70°C
-----------------------	------------

Self-discharge Rate	≤2%
---------------------	-----

900.601.503.081

PX603146 3.0V 1950 mAh Li-MnO₂

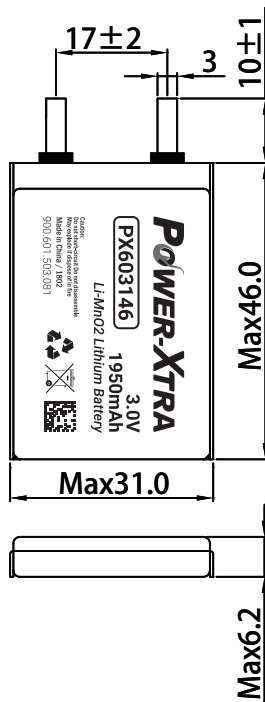

Warning:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

