

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

Revision History 版本记录

Revision 版本	Date 日期	Editor 编著	Contents 内容
A0	2017-04-12	Peter	Draft
A1	2017-06-14	Peter	更改抬头格式, 更改丝印内容
A2	2017-06-26	Peter	更改印字方式及印字内容

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201


Content 目录

1. Drawing of Outline 外框图	4
2. Drawing of Label 标签图	4
3. Specification 产品规格	5
4. General Performance 常规性能	6
5. Safe Characteristic 安全性能	6
6. CAUTIONS IN USE 使用警告	7
7. Battery operation instruction 电池操作说明	7
8. Period of Warranty 保质期	8
9. Other The Chemical Reaction 其它化学反应	9
10. Note: 备注.....	9
11. Drawing Packing 包装图.....	9

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

1. Drawing of Outline 外框图

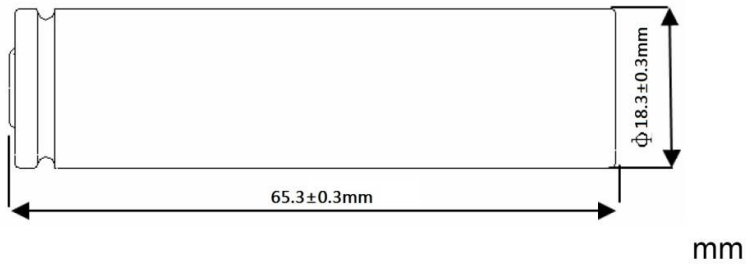

2. Drawing of Label 标签图

印字方式：不干胶卷标丝印。尺寸为：69*64mm。2D(Data Matrix)二维码内容为：“8680187001803”。日期丝印或喷码，日期随出货时间更改，YY为年，MM为月，如1505（2015年05月）。内容如下：



POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

3. Specification 产品规格

NO. 序号	Item 项目	Specifications 规格要求
1	Typical Capacity 典型容量	2000mAh @ 0.2C Discharge (0.2C 放电)
	Minimum capacity 最小容量	1950mAh @ 0.2C Discharge (0.2C 放电)
2	Nominal voltage 标称电压	3.7V
3	Standard Charge 标准充电	CC/CV,0.2C, 4.20V
4	Standard Discharge 标准放电	CC,0.2C, 2.75V
5	End-of-charge Voltage 充电截止电压	4.20V±0.05V
6	End-of-charge Current 充电截止电流	0.02C (At CV mode)
7	End-of-discharge Voltage 放电截止电压	2.75 V
8	Max Charge Current 最大充电电流	1.0 C
9	Max Discharge Current 最大放电电流	1.5 C
10	Initial Impedance 初始内阻	Max:100mΩ
11	Weight 重量	Approx(约): 45g
12	Operating temperature 工作温度	Charging(充电): 0°C-45°C Discharging(放电): -20°C-60°C
13	Storage temperature 储存温度	-5°C-35°C
14	Storage Humidity 储存湿度	≤75% RH
15	Appearance 外观	Without scratch, distortion, contamination and leakage (无划痕、变形、污迹、电解液泄露)
16	Standard environmental condition 标准环境	Temperature(温度) : 25±2°C Humidity(湿度) : 45-75%RH Atmospheric Pressure(大气压) : 86-106 KPA
17	Temperature Dependence of Discharge Capacity 放电容量与温度的相互关系 @ 0.2C Discharge (0.2C 放电)	
	Charge temperature	Discharge temperature
	25°C	-10°C 0°C 15°C 25°C 40°C
	Relative Capacity	50% 80% 90% 100% 100%

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

4. General Performance 常规性能

No.	Item 项目	Test Methods and Condition 测试方法和条件	Criteria 标准
1	0.2C Capacity 0.2C 容量	After standard charging, rest battery for 10min, then discharging at 0.2C to voltage 2.75V, recording the discharging time. 标准充电后,搁置 10 分钟,然后用 0.2C 电流放电至 2.75V, 所记录放电时间	≥100%
2	Cycle Life 循环寿命	Constant current 0.5C charge to 4.2V, then constant voltage charge to current declines to 0.01C, rest 10min, constant current 0.5C discharge to 2.75V, rest 10min. Repeat above steps till continuously discharging capacity Higher than 80% of the Initial Capacities of the Cells 先用 0.5 C 恒流充电至 4.2V,再恒压 4.2V 充电直至充电电流≤0.01C, 搁置 10 分钟,再用 0.5C 电流放电至 2.75V;又搁置 10 分钟,重复以上步骤,直到放电容量是初始容量的 80%	≥300 times(次)

5. Safe Characteristic 安全性能

No.	Item 项目	Test Methods and Condition 测试方法和条件	Criteria 标准
1	Over charge testing 过充测试	At 23±5°C, charging cells with constant current 2C to voltage 5.0V, Stop test till cells temperature 10°C lower than max temperature.	No smoke or fire 不起火,不冒烟
2	Over discharge testing 过放测试	At 23±5°C, According to the requirements of standard charge, the cells will be discharge to cut-off voltage, then connect with external load of 30 ohm for 24 hours.	No fire, no smoke, no leakage. 无起火,无冒烟,无泄液
3	Short-circuit testing 短路测试	At 23±5°C, After standard charging, connect cells anode and cathode by wire which impedance less than 80±20mΩ, keep 6h.	No smoke or fire 不起火,不冒烟
4	Thermal shock 热冲击	Put the cells in the oven. The temperature of the oven is to be raised at 5±2°C per minute to a temperature of 130±2°C and remains 30 minutes. 将电池放进烘箱内,以 5±2°C/min 速度升高烘箱内温度至 130±2°C 后,恒温 30min.	No fire, no smoke 不起火,不冒烟

※ Above testing of safe characteristic must be with protective equipment.(安全性能测试应在有保护措施下进行)

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

6. CAUTIONS IN USE 使用警告

To ensure proper use of the battery please read the manual carefully before using it. Handling
为了使电池安全的使用及处理请在使用前认真的阅读操作说明

- Do not expose to, dispose of the battery in fire.
- 不能把电池曝晒或丢在火中
- Do not put the battery in a charger or equipment with wrong terminals connected.
- 电池充电时不能把正负极性装反
- Avoid shorting the battery
- 避免短路电池
- Avoid excessive physical shock or vibration.
- 避免过分的物理震动和冲击电池
- Do not disassemble or deform the battery.
- 不能拆解或使电池变形
- Do not immerse in water.
- 不能将电池浸入水中
- Do not use the battery mixed with other different make, type, or model batteries.
- 不能将其它不同厂家, 类型, 型号的电池混合使用
- Keep out of the reach of children.
- 禁止小孩接触电池

charge and discharge 充放电

- Battery must be charged in appropriate charger only.
- 电池必须在合适的条件下充电
- Never use a modified or damaged charger.
- 决不能用故障的充电器给电池充电
- Do not leave battery in charger over 24 hours.
- 电池持续充电不能超过 24H

. storage 贮存

- Store the battery in a cool, dry and well-ventilated area.
- 电池贮藏在通风干燥的环境中

. disposal 处理

- Regulations vary for different countries. Dispose of in accordance with local regulations.
- 不同国家法规的不同, 处理时根据当地的法规。

7. Battery operation instruction 电池操作说明

8.1 Charging 充电

Charging current: Cannot surpass the biggest charging current which in this specification book stipulated.

充电电流: 不能超过规格书规定的最大的充电电流

Charging voltage: Does not have to surpass the highest amount which in this specification book stipulated to

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

decide the voltage。

充电电压：不能超过规格书规定的最高的限制电压

Charge temperature: The battery must carry on the charge in the ambient temperature scope which this specification book stipulated.

充电温度：电池充电温度必须按照规格书的温度范围执行

Uses the constant electric current and the constant voltage way charge, the prohibition reverse charges. If the battery positive electrode and the cathode meet instead, can damage the battery.

先恒流后恒压方式充电，禁止颠倒的方式充电。如果电池正负极颠倒充电会带来危险。

8.2 Discharging current 放电电流

The discharging current does not have to surpass this specification book stipulation the biggest discharging current, the oversized electric current electric discharge can cause the battery capacity play to reduce and to cause the battery heat.

电池放电电流不能超过规格书规定的最大放电电流，过大的电流放电会造成电池发热和容量衰减。

8.3 discharge temperature 放电温度

The battery discharge must carry on in the ambient temperature scope which this specification book stipulated

电池放电温度必须按照规格书的温度范围执行

8.4 Over-discharges 过放电

After the short time excessively discharges charges immediately cannot affect the use, but the long time excessively discharges can cause the battery the performance, battery function losing. The battery long-term has not used, has the possibility to be able to be at because of its automatic flashover characteristic certain excessively discharges the condition, for prevented excessively discharges the occurrence, the battery should maintain the certain electric quantity.

短时间的的过充过放不影响电池的使用，但是长时间的过放电会影响到电池的功能失效，电池永久性不能适用，电池可能过放还有一个原因是自动能量的消失。预防电池过放的出现方法是电池应保持一定的电量。

8.5 Storing the Batteries 贮存电池。

The battery should store in the product specification book stipulation temperature range. If has surpasses above for six months the long time storage, suggested you should carry on additional charge to the battery.

电池贮存在规格书规定的温度范围内，如果电池贮存超过六个月，建议你开始给电池充电。

8. Period of Warranty 保质期

The period of warranty is one year from the date of shipment. guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customers abuse and misuse.

电池的保质期从出货之日算起为 1 年。如果证明电池的缺陷是在制造过程中形成的而不是由于用户滥用及错误使用造成，本公司负责退换电池。

POWER-XTRA

Model : Power-Xtra PX-ICR18650 3.7V 2000mAh Li-ion Battery Ver: A2 NO:900.600.503.201

9. Other The Chemical Reaction 其它化学反应

Because batteries utilize a chemical reaction, battery performance will deteriorate over time even if stored for a long period of time without being used. In addition, if the various usage conditions such as charge, discharge, ambient temperature, etc. are not maintained within the specified ranges the life expectancy of the battery may be shortened or the device in which the battery is used may be damaged by electrolyte leakage. If the batteries cannot maintain a charge for long periods of time, even when they are charged correctly, this may indicate it is time to change the battery.

由于电池是利用化学反应的原理，所以随着时间的增加电池的性能会降低，即使是存放很长一段时间而不使用。如果使用条件如充电、放电及周围环境温度等情形不在指定的使用范围内，也会缩短电池的使用寿命，或者产生漏液导致设备损坏。如果电池长周期不能充电，即使充电方法正确，这样需要更换电池了。

10. Note: 备注

Any other items which are not covered in this specification shall be agreed by both parties.
本说明书未包括事项应由双方协议确定。

11. Drawing Packing 包装图

卡纸飞机盒包装，再装外箱，每箱不超 10KG；定制 Logo 纸箱，贴侧唛；外箱 Logo 内容格式如下：

POWER-XTRA

侧唛：

条形码格式：GS1(EAN.UCC)ENA-13 Bar code，侧唛分别贴纸箱两侧（尺寸视纸箱尺寸更改），内容及格式如下：

标签尺寸10*13CM（按情况而定）每箱两面侧面都要贴

PO NO.	order 16-8	根据每次订单而更改
MODEL NO.	900.600.503.201	
QTY	500PCS	根据每箱数量而定
DATE	2016-07-20	根据出货日期而更改
Made in China		

