

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

PX902030-M Battery Spec

Model : PX902030

Stock Code: 900.869.503.181

Cell Type : PX902030

Nominal Voltage: 3.7V

Capacity: 500mAh

Draft	Checking	Approved	Customer Confirmation
Peter	Chun Qi Zeng		

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

Revision History 版本记录

Revision 版本	Date 日期	Editor 编著	Contents 内容
A0	2017-10-31	Peter	Draft
A1	2017-11-17	Peter	增加标签内容

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

1. Product Specification 产品技术规格

Single cell (单电芯)

No.	Item	General Parameter		Remark
1	Rated Capacity	Typical	500mAh	Standard discharge (0.2C) after Standard charge
		Minimum	490mAh	
2	Nominal Voltage	3.7V		Mean Operation Voltage
3	Voltage at end of Discharge	2.75V		Discharge Cut-off Voltage
4	Charging Voltage	4.2±0.03V		
5	Internal Impedance	≤250mΩ		Internal resistance measured at AC 1KHZ after 50% charge (半电态下用交流法测量内阻) The measure must uses the new batteries that within one week after shipment and cycles less than 5 times
6	Weight 重量	About 10 g		
7	Standard charge	Constant Current 0.2C Constant Voltage 4.2V 0.01 C cut-off		
8	Standard discharge	Constant current 0.2C end voltage 2.75V		
9	Fast charge	Constant Current 1.0C Constant Voltage 4.2V 0.01C cut-off		
10	Fast discharge	Constant current 1.0C end voltage 2.75V		
11	Maximum Continuous Charge Current	1.0C		
12	Maximum Continuous Discharge Current	1.0C		
13	Operation Temperature Range	Charge (充电) : 0~45°C		60±25%R.H.
		Discharge (放电) : -20~60°C		Bare Cell
14	Storage Temperature Range	Less than 1 year: -20~25°C		60±25%R.H.
		less than 3 months: -20~40°C		at the shipment state
15	Single cell	Length 长(L)	30.0±0.5mm	Initial Dimension
		Width 宽(W)	20.0±0.5mm	
		Height 高(H)	9.0±0.2mm	

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

2. Performance And Test Conditions 电池性能及测试条件

3.1 Standard Test Conditions 标准测试条件

Test should be conducted with new batteries within one week after shipment from our factory and the cells shall not be cycled more than five times before the test. Unless otherwise specified, test and measurement shall be done under temperature of $20\pm 5^{\circ}\text{C}$ and relative humidity of 45-85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at temperature $15-30^{\circ}\text{C}$ and humidity 25-85%RH.

3.2 Measuring Instrument or Apparatus 测量器具及设备

3.2.1 Dimension Measuring Instrument 尺寸测量器具

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm.

3.2.2 Voltmeter 伏特计

Standard class specified in the national standard or more sensitive class having inner impedance more than $10\text{k}\Omega/\text{V}$

3.2.3 Ammeter 安培计

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01Ω .

3.2.4 Impedance Meter 电阻计

Impedance shall be measured by a sinusoidal alternating current method(1kHz LCR meter).

3.3 Appearance 外观

There shall be no such defect as flaw, crack, rust, leakage, which may adversely affect commercial value of battery.

3.4 Temperature Dependence of discharge capacity 放电温度特性

Table 3 (表 3)

Discharge Temperature	-10°C	0°C	23°C	60°C
Discharge Capacity (0.2C)	50%	80%	100%	95%

3.5 Cycle Life and Leakage-Proof 循环寿命及漏液试验

Table 4 (表 4)

No.	Item	Criteria	Test Conditions
1	Cycle Life (0.5C)	Higher than 70% of the Initial Capacities of the Cells	Carry out 500cycle Charging/Discharging in the below condition. ◆Charge:Standard Charge ◆Discharge:0.5C to 2.75 V ◆Rest Time between charge/discharge:30min. ◆Temperature: $20\pm 5^{\circ}\text{C}$
2	Leakage-Proof	No leakage (visual inspection)	After full charge with standard charge, store at $55\pm 3^{\circ}\text{C}$, $60\pm 10\%\text{RH}$ for 1 week.

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

3. Mechanical characteristics and Safety Test for Cell 电芯安全测试及机械特性

Table 5 (表 5) (Mechanical characteristics)

No.	Items	Test Method and Condition	Criteria
1	Vibration Test	After standard charging, fixed the cell to vibration table and subjected to vibration cycling that the frequency is to be varied at the rate of 1Hz per minute between 10Hz an 55Hz, the excursion of the vibration is 1.6mm. The cell shall be vibrated for 30 minutes per axis of XYZ axes.	No leakage No fire
2	Drop Test	The cell is to be dropped from a height of 1 meter twice onto concrete ground.	No explosion, No fire, no leakage

Table 6 (表 6) (Safety Test)

Item	Battery Condition	Test Method	Requirements
Crush	Fresh, Fully charged	Crush between two flat plates. Applied force is about 13kN(1.72Mpa) for 30min.	No explosion, No fire
Short Circuit (20°C)	Fresh, Fully charged	Each test sample battery, in turn, is to be short-circuited by connecting the (+) and (-) terminals of the battery with a Cu wire having a maximum resistance load of 0.1Ω. Tests are to be conducted at room temperature(20±2°C).	No explosion, No fire The Temperature of the surface of the Cells are lower than 150°C
Short Circuit (60°C)	Fresh, Fully charged	Each test sample battery, in turn, is to be short-circuited by connecting the (+) and (-) terminals of the battery with a Cu wire having a maximum resistance load of 0.1Ω. Tests are to be conducted at temperature(60±2°C).	No explosion, No fire The Temperature of the surface of the Cells are lower than 150°C
Impact	Fresh, Fully charged	A 56mm diameter bar is inlayed into the bottom of a 10kg weight. And the weight is to be dropped from a height of 1m onto a sample battery and then the bar will be across the center of the sample.	No explosion, No fire
Forced Discharge	Fresh, Fully charged	Discharge at a current of 1.0Cfor 2.5h.	No explosion, No fire
Nail Pricking (3mm)	Fresh, Fully charged	Prick through the sample battery with a nail having a diameter of 3mm and remain 2h.	No explosion, No fire

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

4. Protection circuit 保护电路

(PCM Standard 保护板标准)

Item	Symbol	Content	Criterion
Over charge Protection (过充保护)	VDET1	Over charge detection voltage (过充电检测电压)	4.28±0.05V
	tVDET1	Over charge detection delay time (过充电检测延迟时间)	80–200ms
	VREL1	Over charge release voltage (过充电解除电压)	4.10±0.05V
Over discharge protection (过放保护)	VDET1	Over discharge detection voltage (过放电检测电压)	2.40±0.10V
	tVDET1	Over discharge detection delay time (过放电检测延迟时间)	40-120ms
	VREL1	Over discharge release voltage (过放电解除电压)	3.00±0.1V
Over current protection (过流保护)	VDET3	Over current detection voltage (过电流检测电压)	1.30±0.5V
	IDP	Over current detection current (过电流保护电流)	3.5±1.0A
	tVDET3	Detection delay time (检测延迟时间)	5-20ms
		Release condition (保护解除条件)	Cut load (断开负载)
Short protection (短路保护)		Detection condition (保护条件)	Exterior short circuit (外部电路短路)
	TSHOR	Detection delay time (检测延迟时间)	5-120ms
		Release condition (保护解除条件)	Cut short circuit (断开短路电路)
Interior resistance (内阻)	RDS	Main loop electrify resistance (主回路通态电阻)	VC=4.2V,RDS≤70mΩ
Current consumption (消耗电流)	IDD	Current consume in normal operation (工作时电路内部消耗)	3.0μA Type 6.0μA Max

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

5. Handling of Cells 电池操作注意事项

5.1 Consideration of strength of film package 包装薄膜注意事项

1) Soft Aluminium foil 铝箔软包装

Easily damaged by sharp edge parts such as pins and needles, Ni-tabs, comparing with metal-can-cased LIB.

相对于金属壳的方形电池，铝箔软包装比较容易被锐利部件刺损，如针尖、镍带。

2). Sealed edge may be damaged by heat above 100°C, bend or fold sealed edge.

封边被加热到 100°C 以上以及弯折封边都容易使封边受损。

5.2 Prohibition short circuit 禁止电池短路

Never make short circuit cell. It generates very high current which causes heating of the cells and may cause electrolyte leakage, gassing or explosion that are very dangerous.

The Power-Xtra tabs may be easily short-circuited by putting them on conductive surface. Such outer short circuit may lead to heat generation and damage of the cell.

An appropriate circuitry with PCM shall be employed to protect accidental short circuit of the battery pack.

避免电池短路。短路会产生很高的电流而使电池发热以及电解液泄漏，产生有毒气体或爆炸是非常危险的。极片连接在导电物体表面很容易短路，外部短路会导致发热及损害电池。选用一个适当的保护电路可以在意外短路时保护电池。

5.3. Mechanical shock 机械撞击

Power-Xtra cells have less mechanical endurance than metal-can-cased LIB.

Falling, hitting, bending, etc. may cause degradation of Power-Xtra characteristics.

聚合物电池比金属壳方形电池的机械耐久性更小。

跌落、碰撞、弯曲等等都可能会降低聚合物电池的性能。

5.4 Handling of tabs 极片操作注意事项

The battery tabs are not so stubborn especially for aluminum tab.

Don't bend tab.

Do not bend tabs unnecessarily.

极片的机械强度并非异常坚固，特别是铝片。没有必要时禁止弯折极片。

6. Storing the Batteries 电池的存放

The batteries should be stored at room temperature, charged to about 30% to 50% of capacity.


We recommend that batteries be charged about once per half a year to prevent over discharge.

电池应当在室温下存放，应充到 30%至 50%的电量。如长时间储存，建议每半年充一次电以防止电池过放电。

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

7. Dimension 尺寸

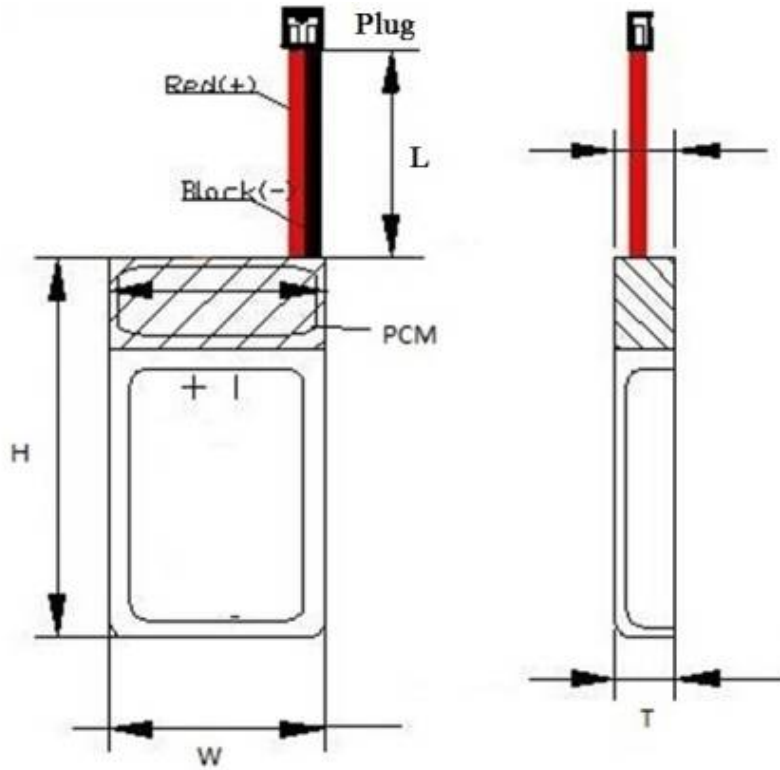


Dimensions 尺寸 (Units 单位: mm)	PCM	常规保护板 Normal PCM (1.5A)
	Length Cable 线长 (L)	20±5mm (注: 不含插头)
	Width 宽(W)	32.0±1mm
	Height 高(H)	23±1mm
	Thickness 厚(T)	9.2±0.5mm
	Cable 线号	UL1007#26AWG
	Plug (插头)	ACHR-02V-S (copy) Forward direction

POWER-XTRA

Model : Power-Xtra PX902030 3.7V 500 mAh Li-Polymer Battery with PCM (1.5A) 2 cm Ver: A1 NO: 900.869.503.181

8. Drawing of Label 标签图

PET 透明标签，2D(Data Matrix)二维码。日期按出货月份更改。MM 为月，YY 为年，年份在前，月份在后（月年），如：1607（2016 年 07 月）。标签格式如下：

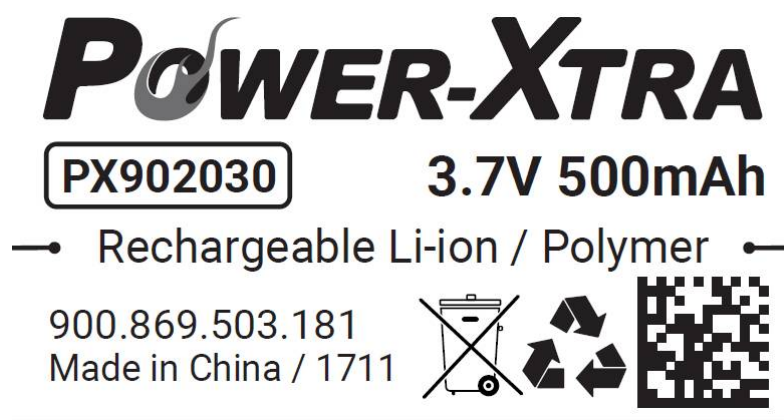

9. Drawing Packing 包装图

整齐入托盘，内置防潮袋，每箱不超 10KG，贴侧唛：客户定制 Logo 外箱；外箱 Logo 内容格式如下：

POWER-XTRA

侧唛：

条形码格式为：GS1(EAN.UCC)/ENA-13 Bar code，侧唛分别贴于纸箱两侧（尺寸视纸箱尺寸更改），内容及格式如下：

PO NO.	Order	← 根据每次订单更改
MODEL NO.	900.869.503.181	
QTY	500PCS	← 根据每箱数量更改
DATE	YYYY-MM-DD	← 根据出货日期更改
Made in China		
		
8 680187 004262		