



PX18-12SHR 12Volt 18Ah

Specifications

Nominal Voltage(V)	12V		
Nominal Capacity			
20 hour rate	(0.9A	to	10.50V) 18Ah
10 hour rate	(1.71A	to	10.50V) 17.1Ah
5 hour rate	(3.06A	to	10.20V) 15.3Ah
1 C	(18A	to	9.60V) 11.4Ah
3 C	(54A	to	9.60V) 7.2Ah
Weight	Approx. 5.6kg(12.32Lbs.)		
Internal Resistance (at 1KHz)	Approx. 10.5 mΩ		
Maximum Discharge Current for			
5 seconds:	270A		
Charging Methods at 25°C(77°F)			
Cycle use:			
Charging Voltage	14.4 to 15.0V		
Coefficient	-5.0mV/ °C/cell		
Maximum Charging Current	5.4A		
Standby use:			
Float Charging Voltage	13.5 to 13.8 V		
Coefficient	-3.0mV/ °C/cell		
Operating Temperature Range			
Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)
Charge Retention (shelf life) at 20°C(68°F)			
1 month	92%		
3 month	90%		
6 month	80%		
Case Material	ABS UL94 HB		
	Option: Flammability resistance of (UL94 V-0)		
Terminal	F3		


Dimensions

mm(inch)

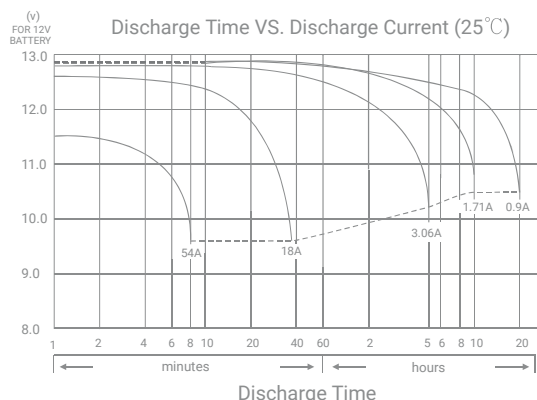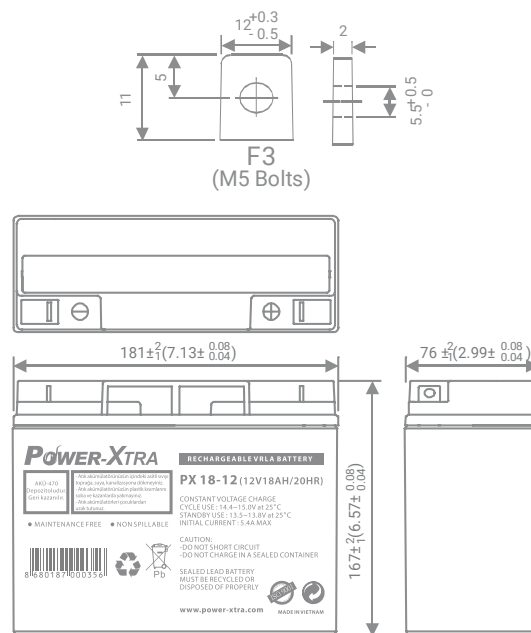


PX18-12SHR 12Volt 18Ah


Effect of Temperature on Capacity 25°C(77°F)

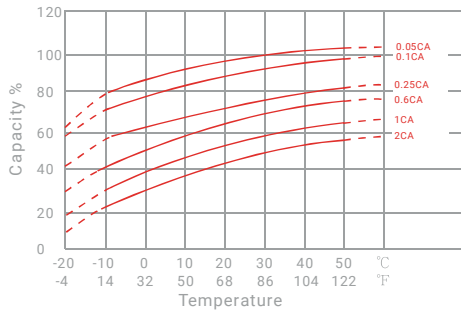


Capacity Retention Characteristic

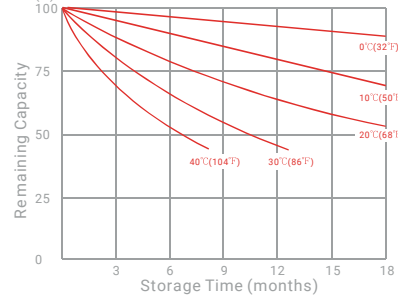

Trickle (or float) Service Life



Cycle Service Life

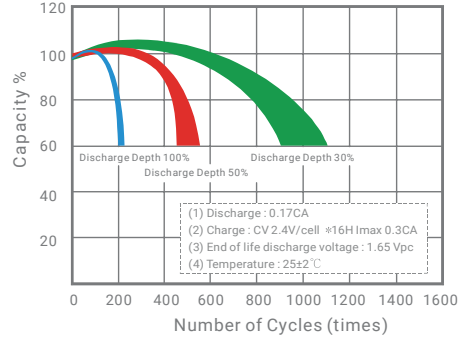

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	98.9	116	128	135	137	139	141
10	min	67.0	77.1	84.5	89.1	90.2	91.7	92.9
15	min	57.2	64.5	69.4	72.5	73.3	74.2	75.1
30	min	32.7	35.1	37.7	39.4	39.8	40.3	40.8
60	min	18.8	19.8	20.7	21.3	21.5	21.8	22.2
120	min	11.9	12.4	12.7	13.1	13.2	13.3	13.5
180	min	8.75	9.10	9.33	9.53	9.60	9.68	9.78
240	min	6.63	6.93	7.12	7.27	7.32	7.38	7.46
300	min	5.82	6.05	6.17	6.27	6.30	6.35	6.41
600	min	3.40	3.52	3.60	3.67	3.68	3.72	3.75
1200	min	1.77	1.83	1.88	1.92	1.93	1.95	1.96

- Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	62.6	68.3	71.9	75.1	76.4	77.8	80.2
10	min	38.6	41.8	44.3	46.5	47.4	48.4	50.1
15	min	31.9	34.6	36.3	37.7	38.2	38.8	39.7
30	min	17.4	18.7	19.8	20.7	21.0	21.4	21.9
60	min	9.74	10.3	10.7	11.0	11.1	11.3	11.5
120	min	5.98	6.23	6.39	6.53	6.58	6.64	6.72
180	min	4.35	4.52	4.64	4.73	4.76	4.80	4.85
240	min	3.43	3.52	3.58	3.62	3.63	3.65	3.68
300	min	2.96	3.02	3.07	3.11	3.12	3.14	3.16
600	min	1.73	1.77	1.80	1.82	1.83	1.84	1.85
1200	min	0.893	0.914	0.931	0.946	0.952	0.959	0.962

All data on the spec. sheet is an average value:

The tolerance range : $X < 6\text{min}$ (+15%~-15%), $6\text{min} \leq X < 10\text{min}$ (+12%~-12%), $10\text{min} \leq X < 60\text{min}$ (+8%~-8%), $X \geq 60\text{min}$ (+5%~-5%)